

FIG. 1


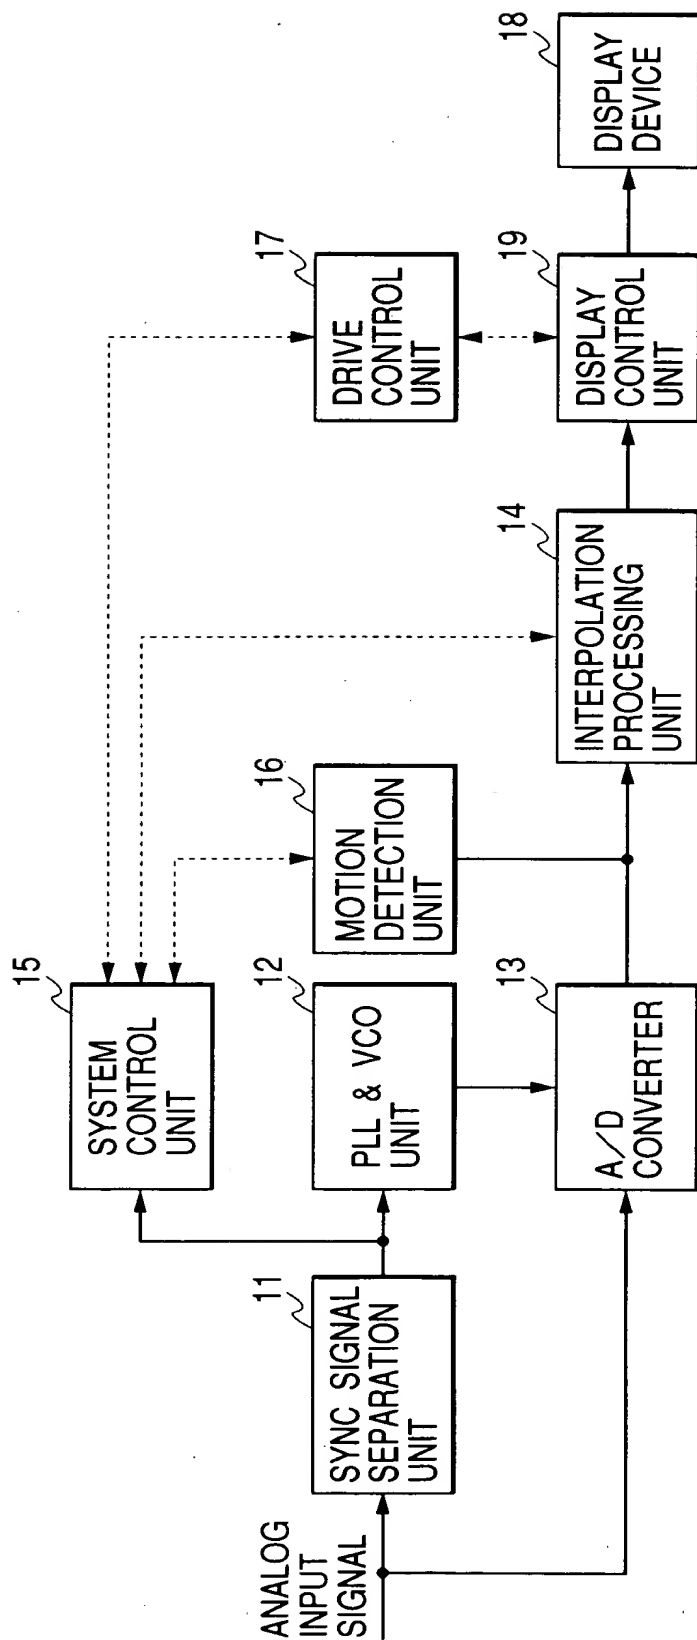


FIG. 2

FIG. 2A


FIG. 2B

FIG. 2A

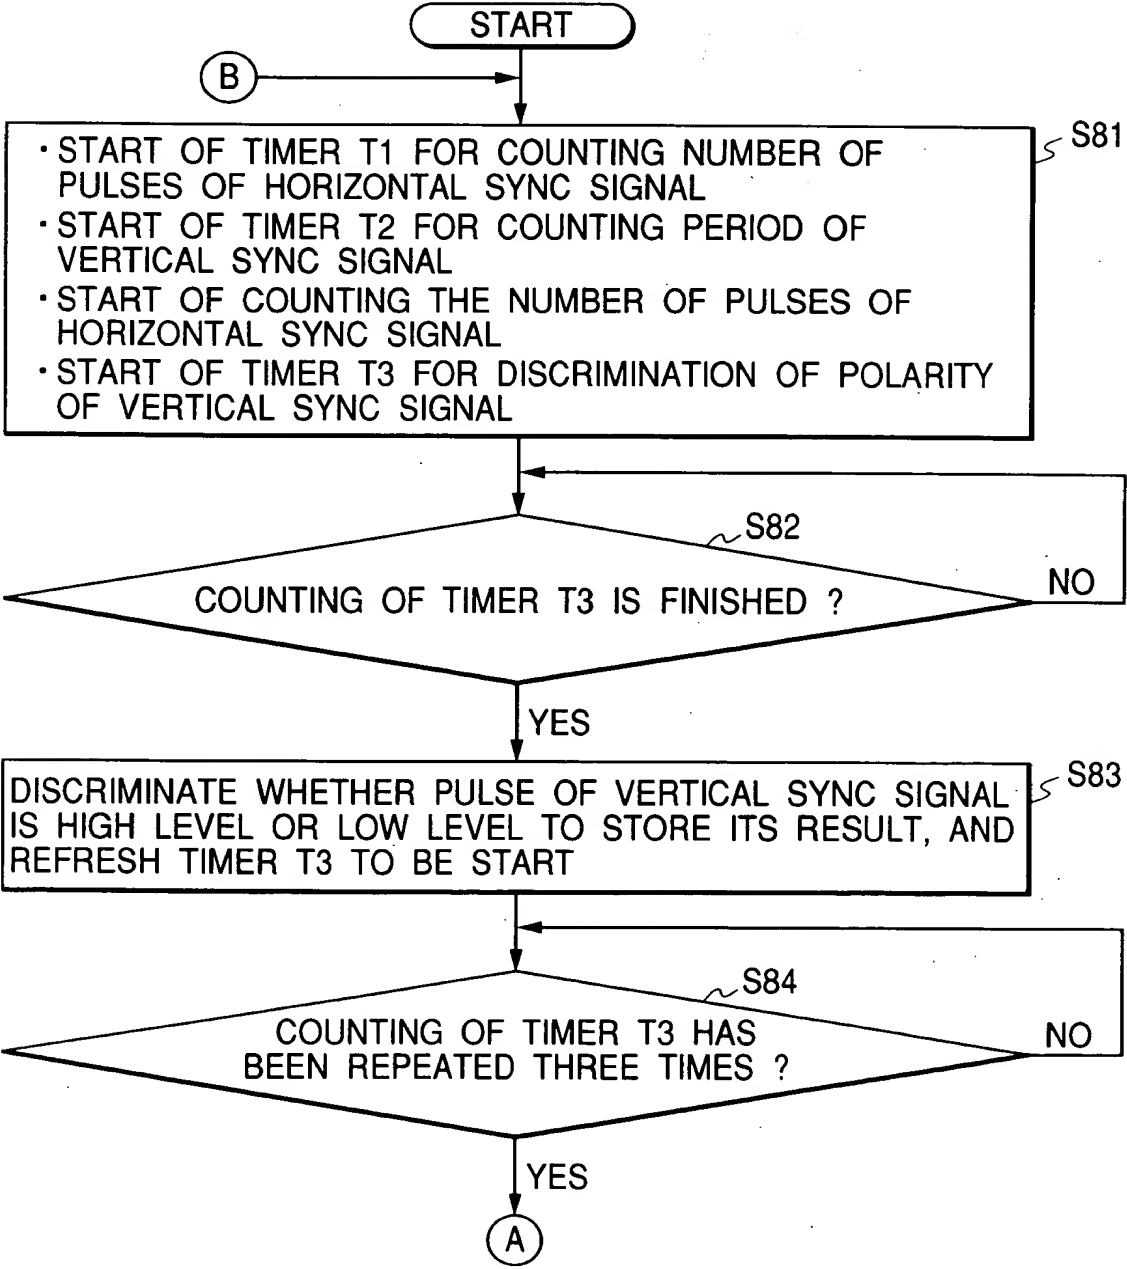

265727 4446680

FIG. 2B

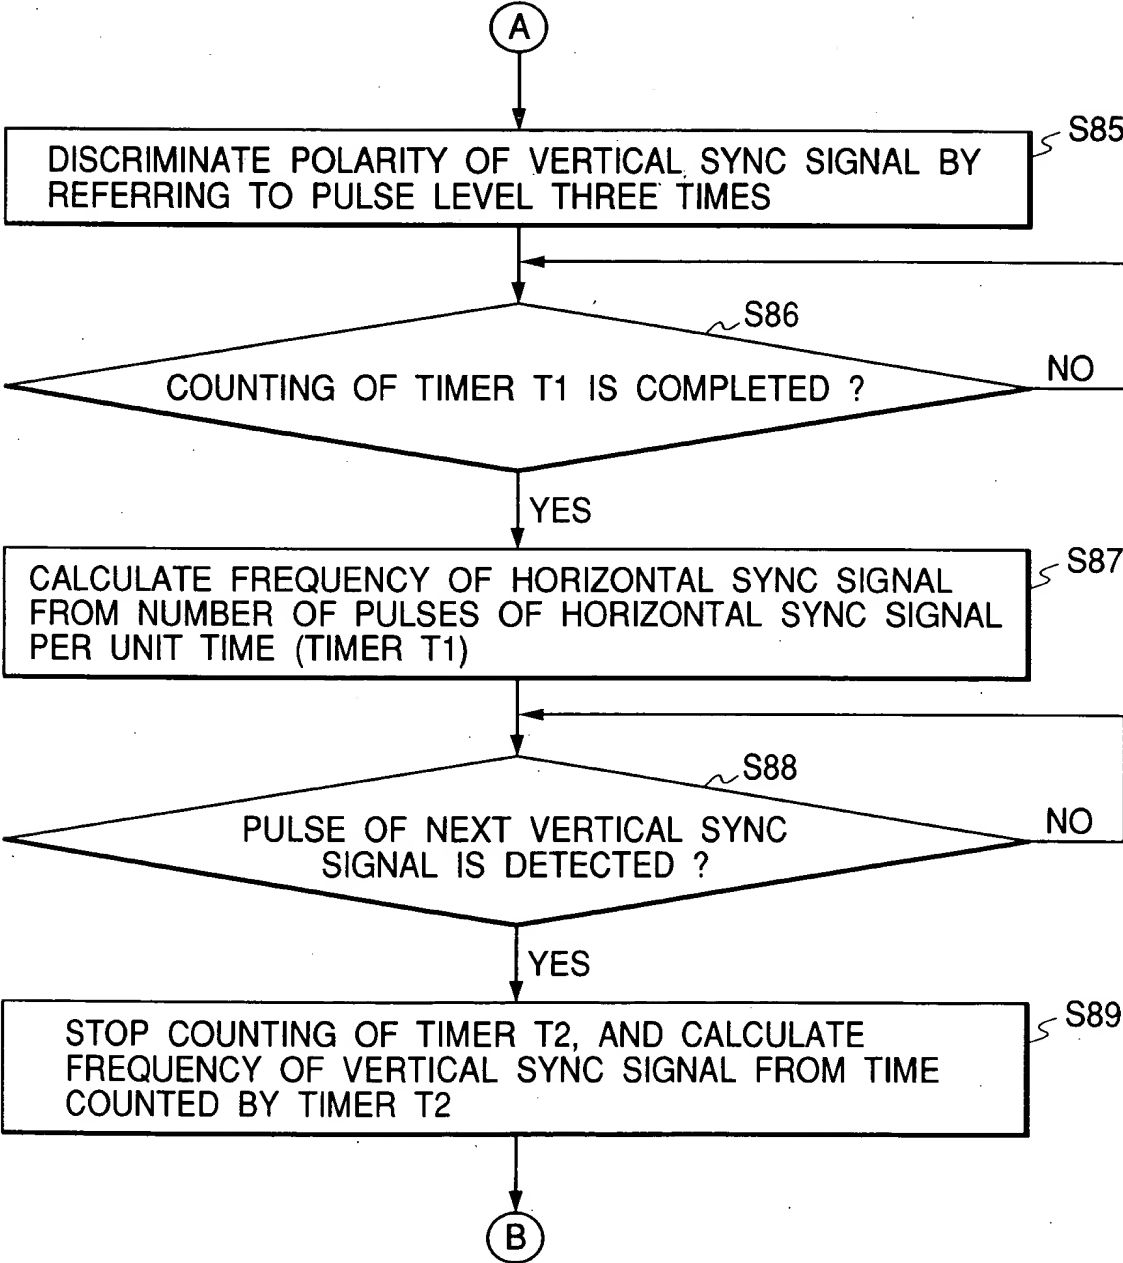

466T2 444680

465T2F" 4446580

FIG. 3


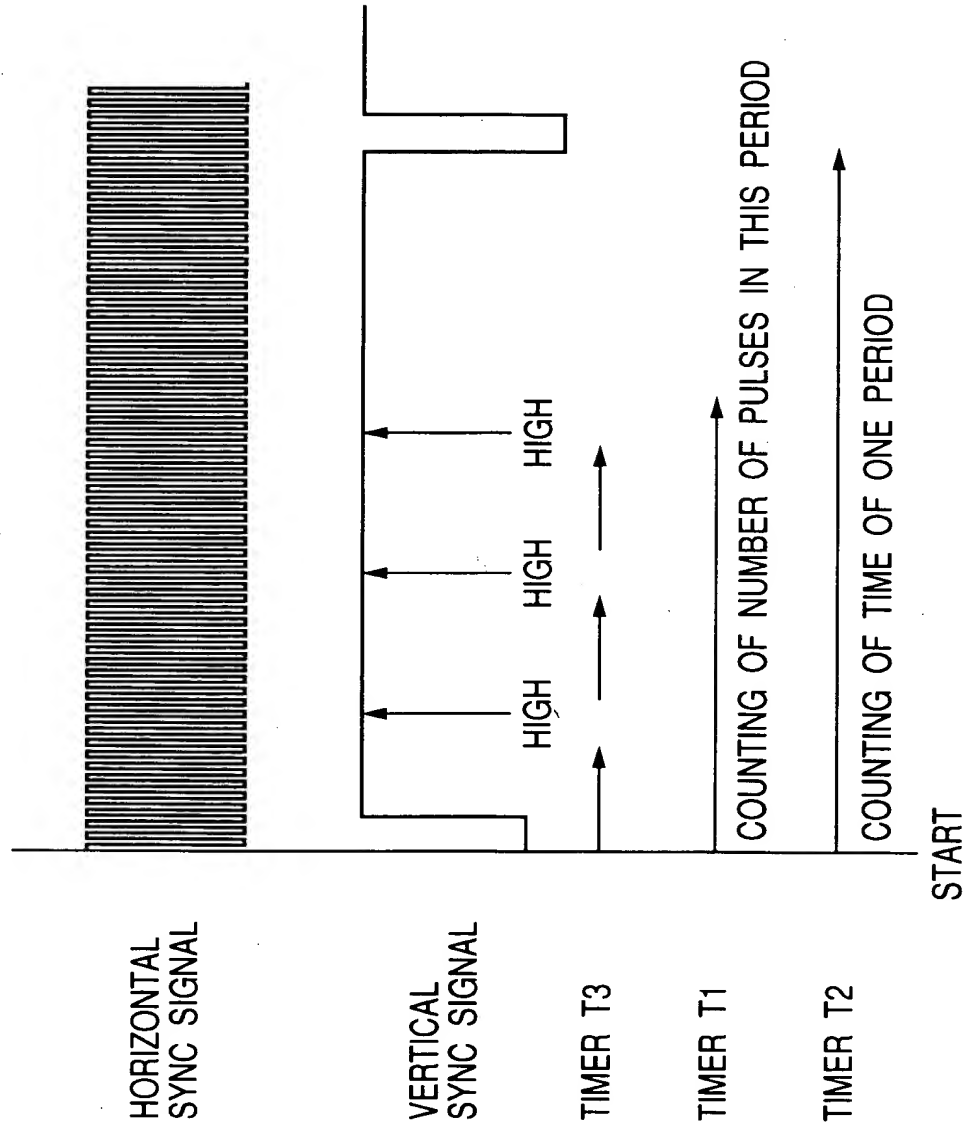



FIG. 4

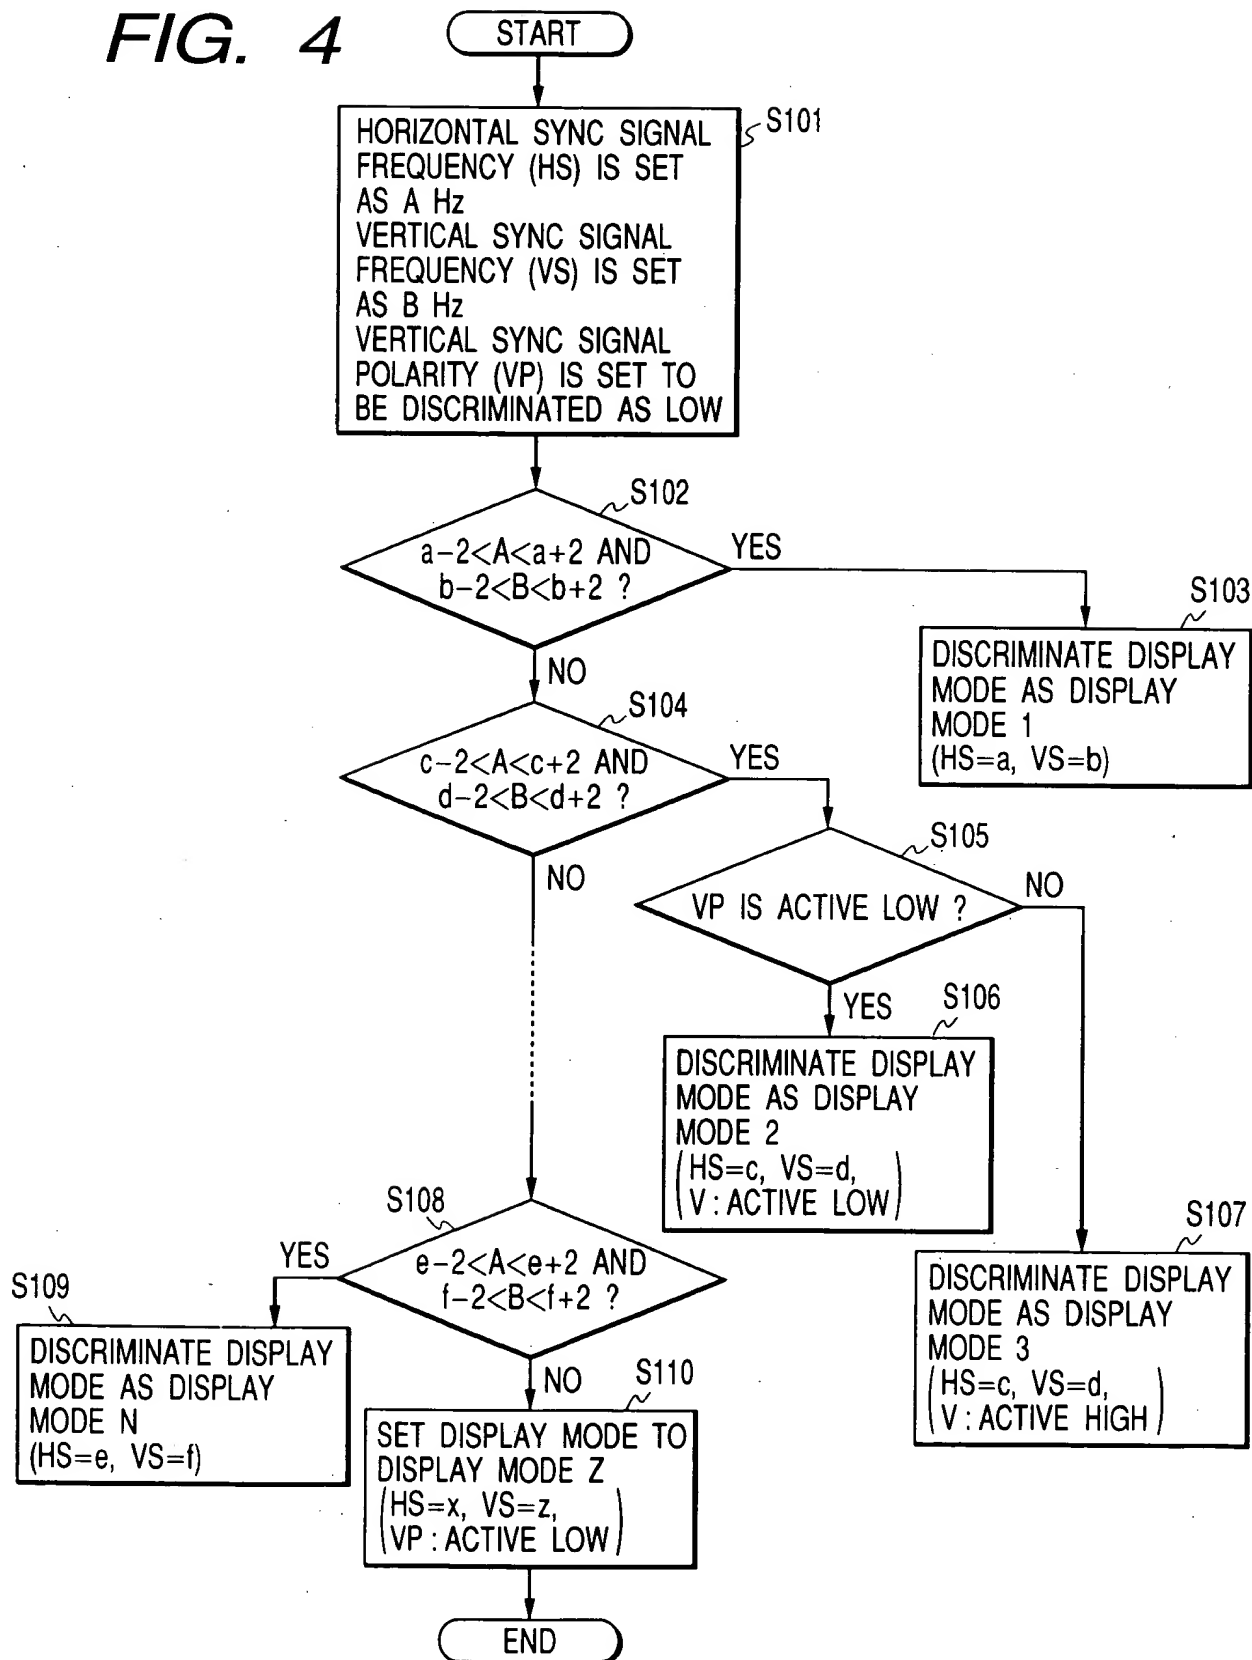

DESIGNED	O.G. FIG.	
BY	CLASS	SUBCLASS
RAFTSMAN		

6 / 14


*FIG. 5*

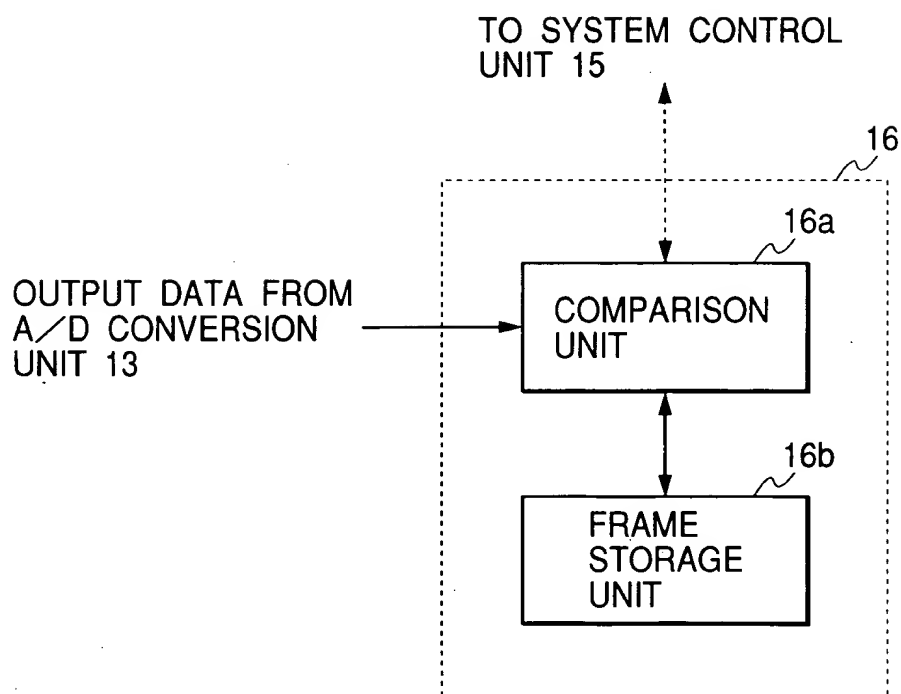


465227 4446680

7/14


**FIG. 6**

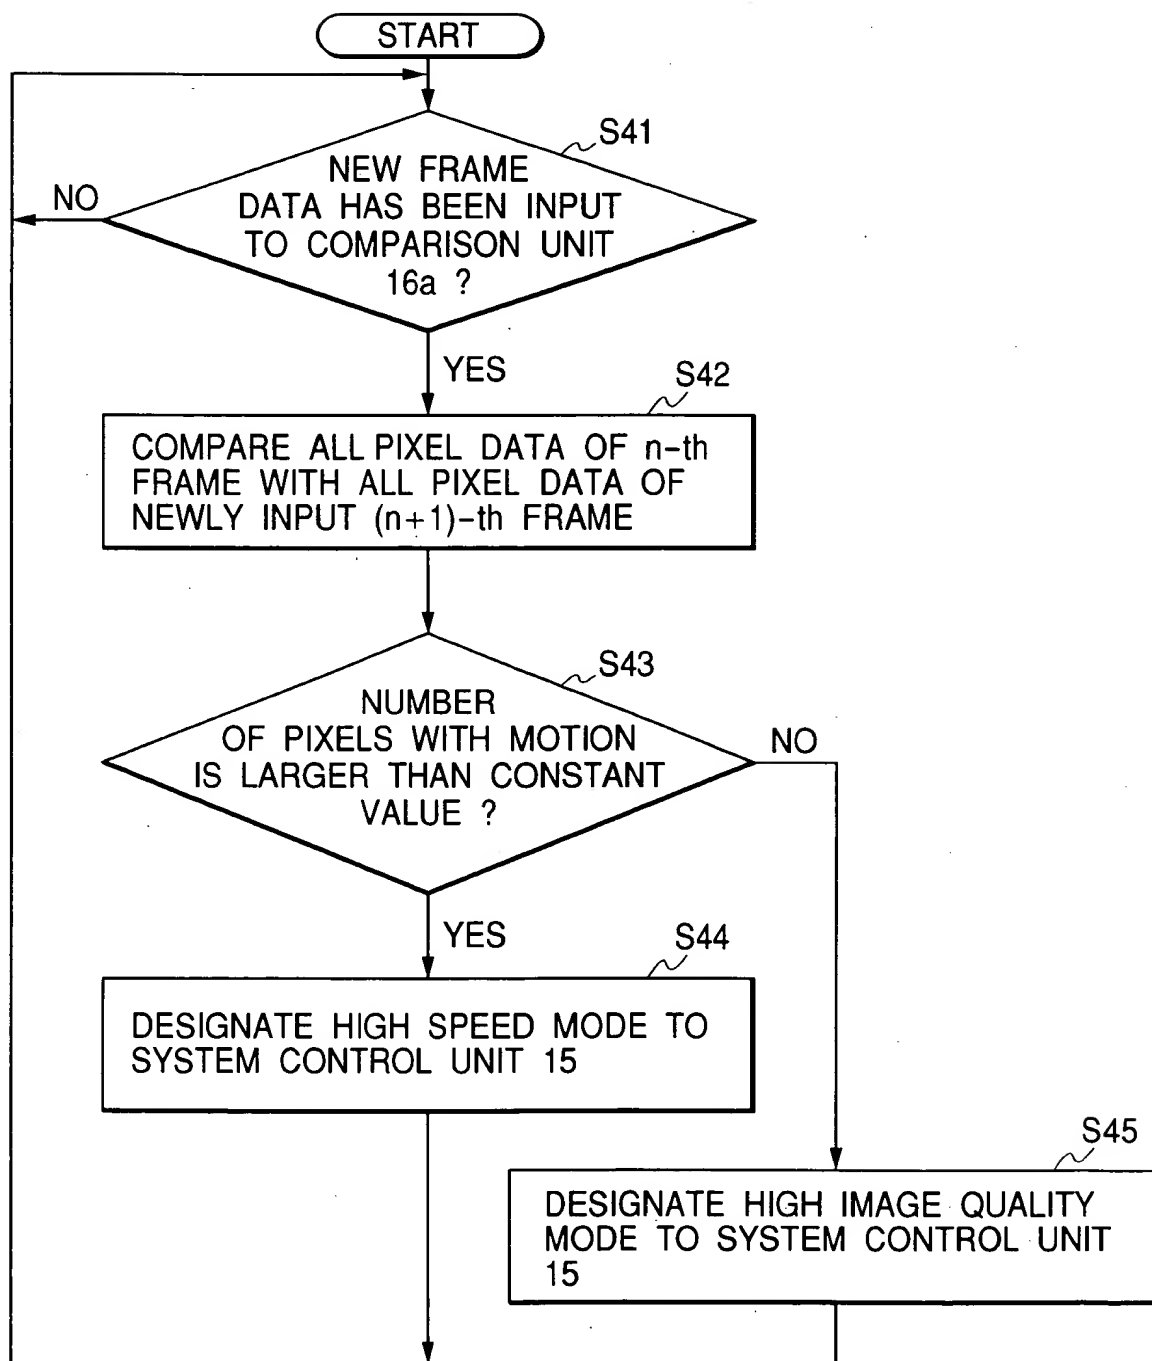

**FIG. 7A**

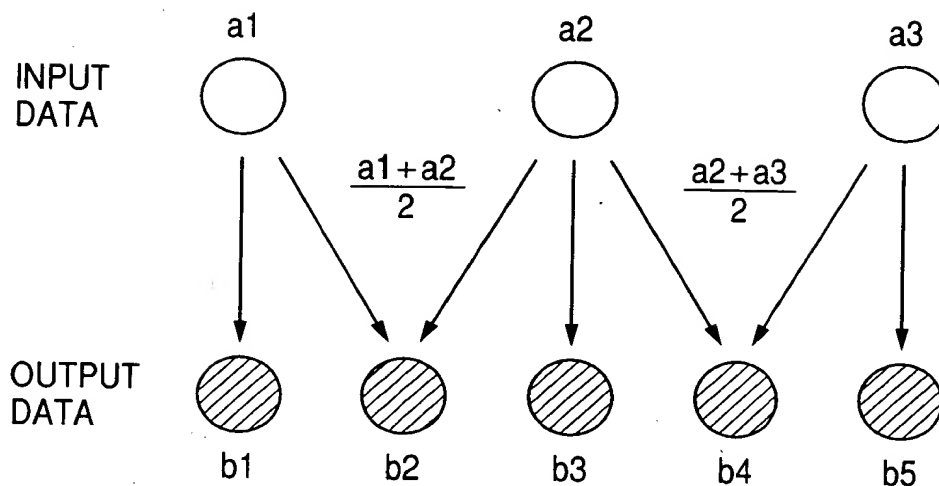

**FIG. 7B**

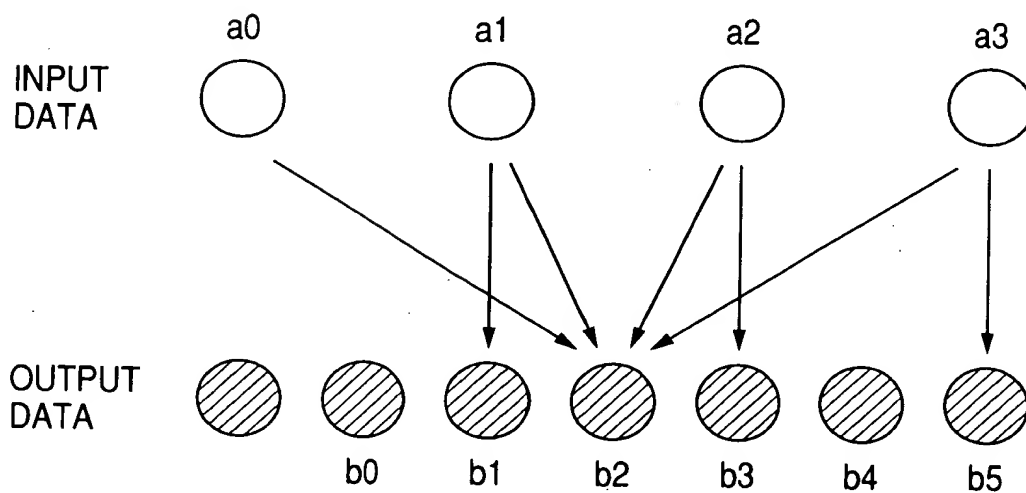




465727 4446580

**FIG. 8A**

IN HIGH SPEED MODE




INPUT  
DATA



ONLY HORIZONTAL  
DIRECTION IS  
INTERPOLATED TO  
HORIZONTAL  
RESOLUTION OF  
DISPLAY DEVICE



TWO LINES ARE  
SIMULTANEOUSLY  
DRIVEN TO  
DISPLAY SAME  
DATA

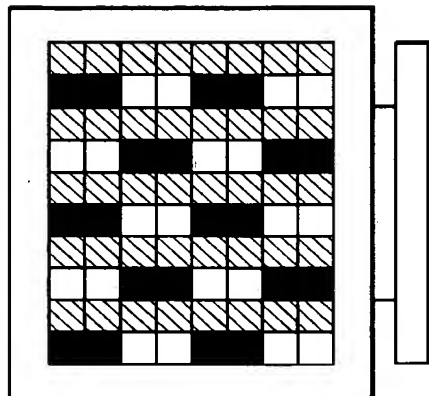


**FIG. 8B**

IN HIGH IMAGE QUALITY MODE




INPUT  
DATA



HORIZONTAL AND  
VERTICAL  
RESOLUTIONS ARE  
INTERPOLATED TO  
THOSE OF  
DISPLAY DEVICE




DATA HAVING  
RESOLUTION  
EQUAL TO THAT  
OF DISPLAY  
DEVICE IS DRIVEN  
TO BE DISPLAYED

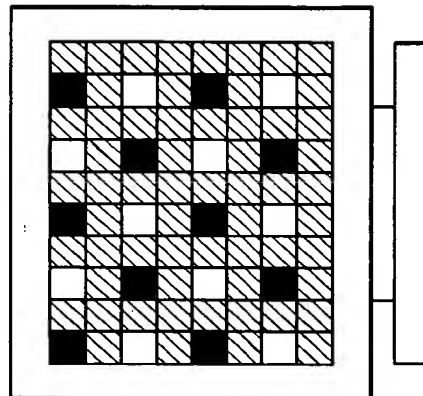


465T2T 4446580


FIG. 9

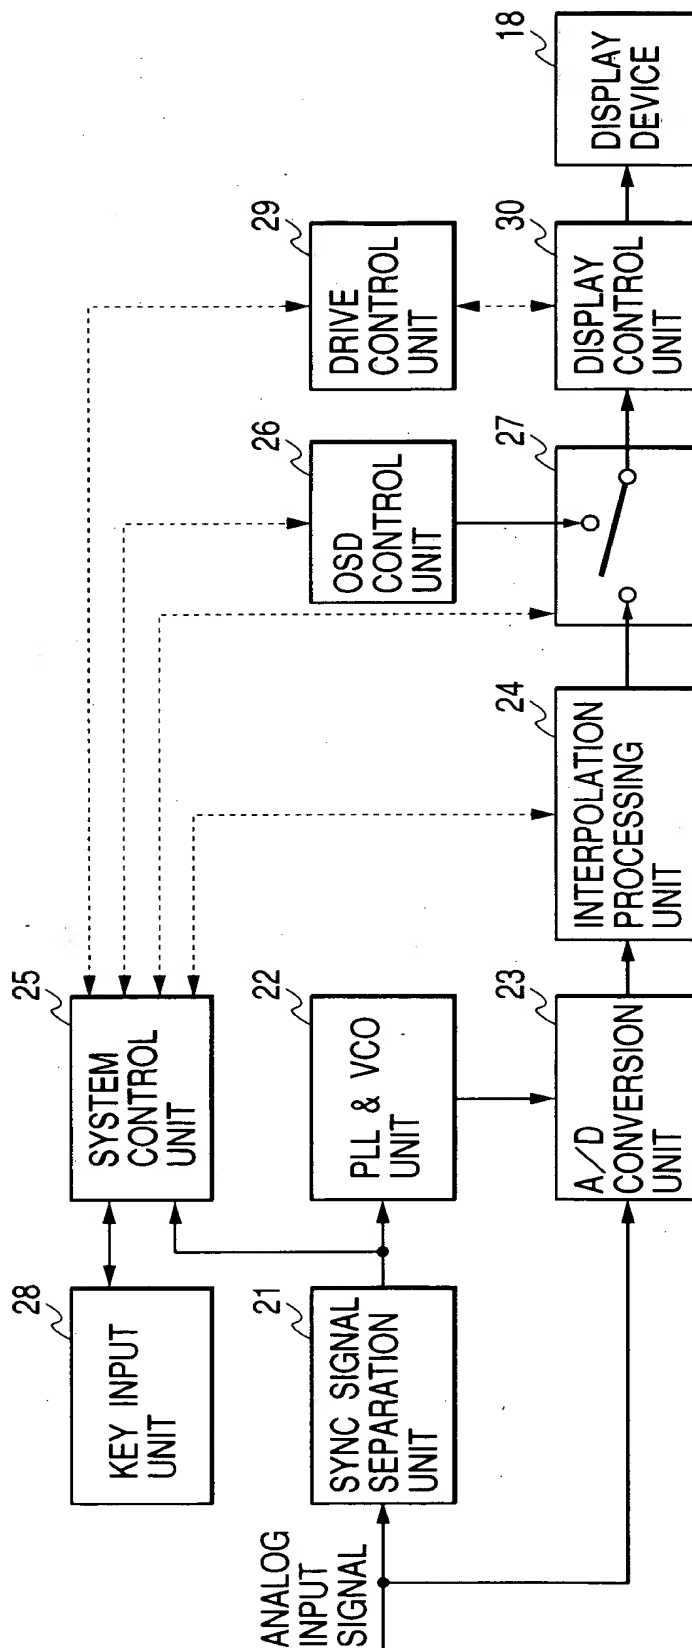


**FIG. 10A**

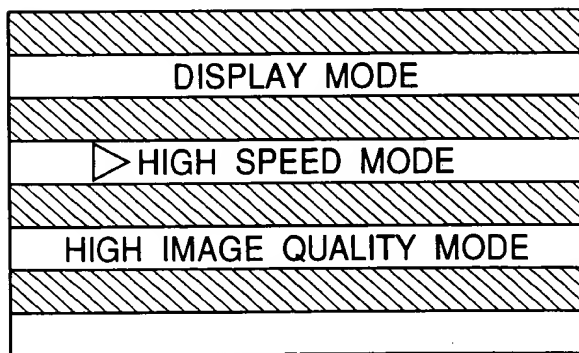

**FIG. 10B**

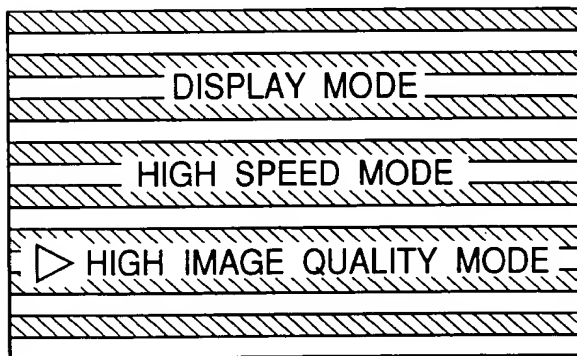


**FIG. 10C**

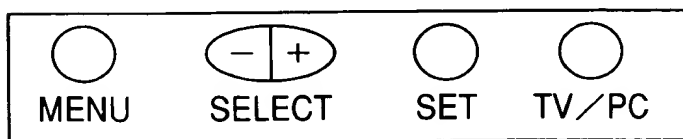

2025-11-14 14:44:58

FIG. 11

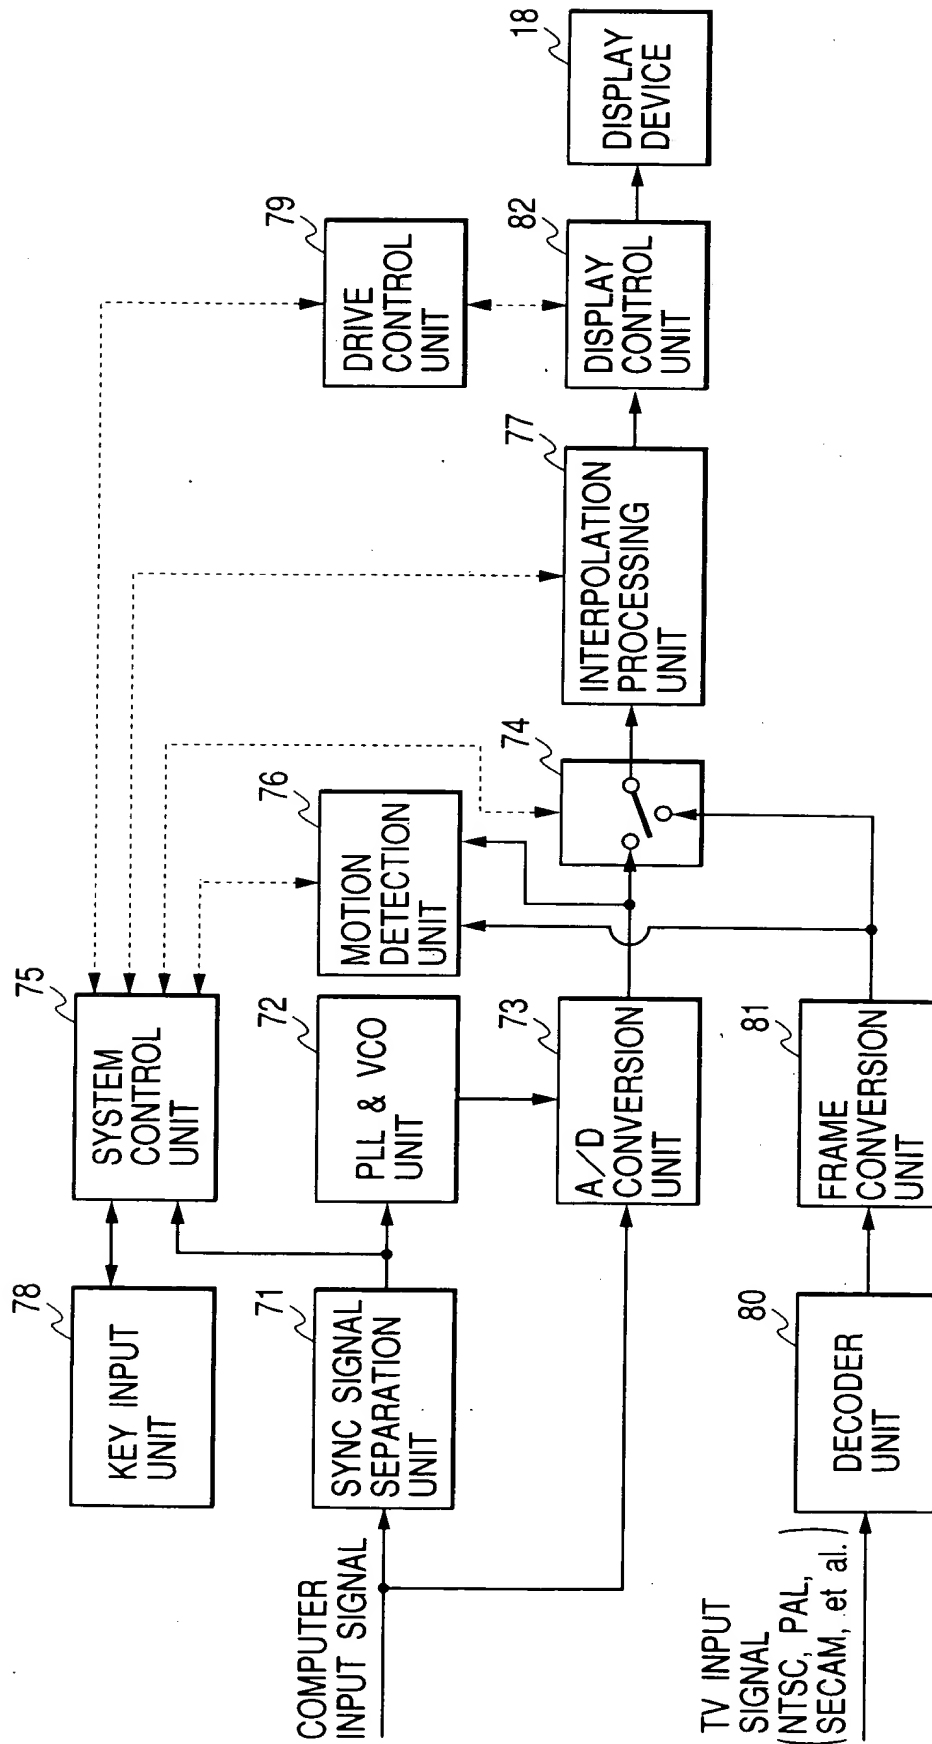

4515T2T 2444580

FIG. 12

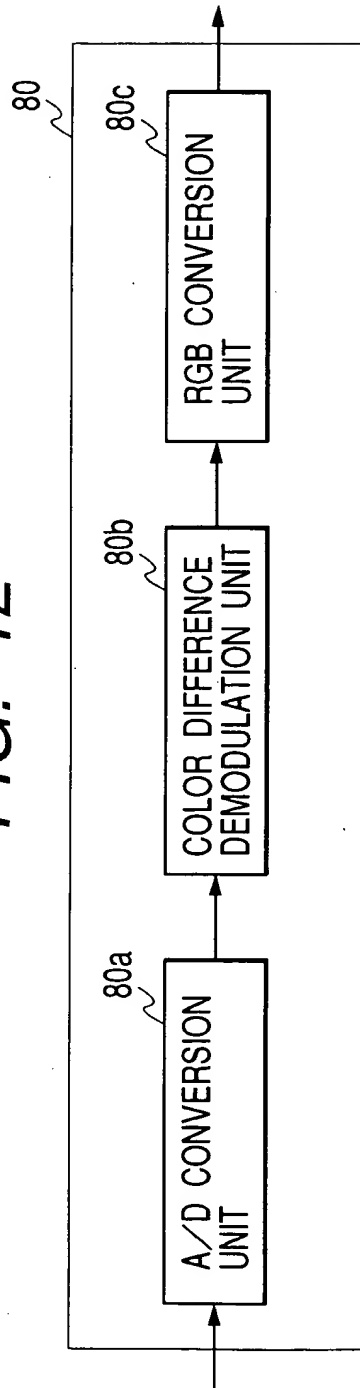


FIG. 13

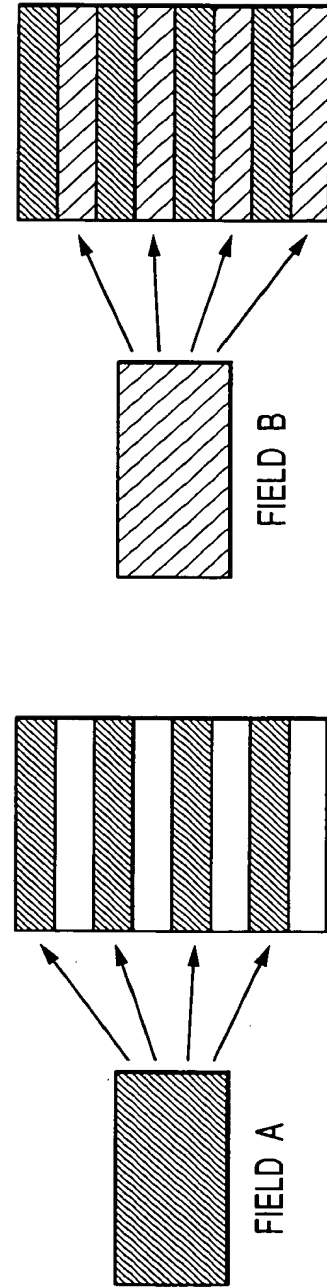


FIG. 14

